

kendila

Hive **MEDUSA**

Linear Flex Series

Installation. V00

Architectural Collection

www.kendila.com




BEFORE YOU BEGIN

- This product is suitable for indoor and outdoor use, and should be kept away from open fire or high temperature objects. Please install and use it by professionals.
- Before installing and using the product, please confirm that the product is not damaged during transportation for timely replacement or return, so as to ensure the legitimate rights and interests of consumers.
- Non professionals are not allowed to disassemble and repair the product. If maintenance is required, please contact our sales person. Our company will not replace or guarantee the product disassembled and repaired without permission.
- Before cleaning the product, please turn off the power and do the cleaning with dry cloth. Please do not clean with chemical or corrosive solvents.


INSTALLATION NOTES

- Please install the product by professional electrician to avoid accidents or damage.
- Cut off the power supply before wiring, and a power supply in 24VDC complying with class2 must be used.
- Please refer to our compatible drivers in the product page.
- Please handle with care during installation to ensure the best performance of the product.
- If it is not installed following the relevant requirements and regulations in the manual, the manufacturer shall not be responsible for the loss and damage caused.

FIXATION ACCESSORIES

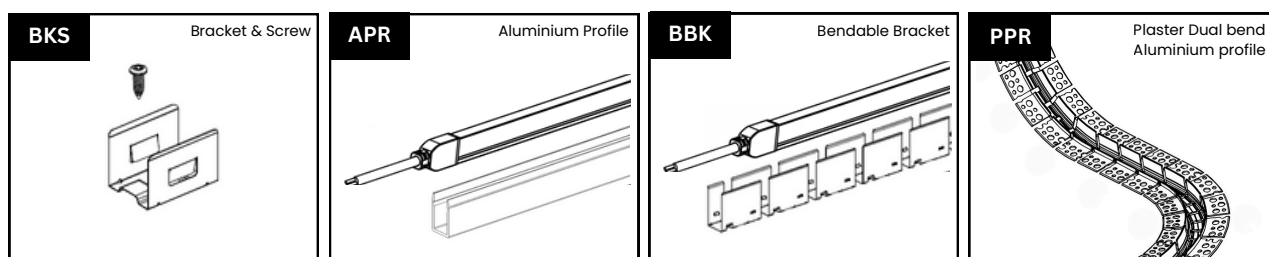



CABLE FEED

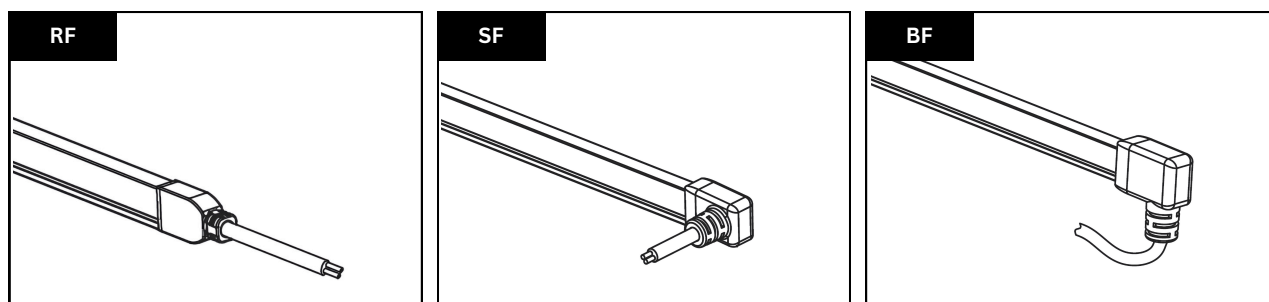





INSTALLATION STEPS



Bracket & Screw

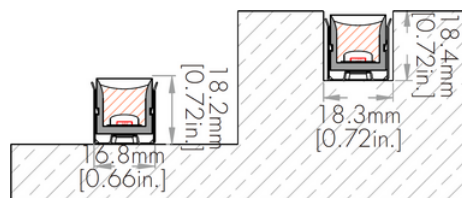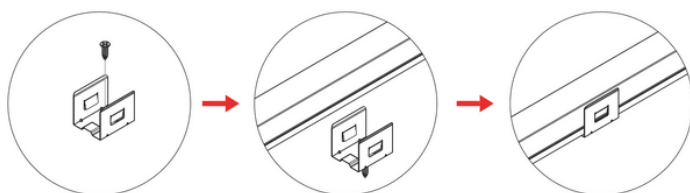



Aluminium Profile

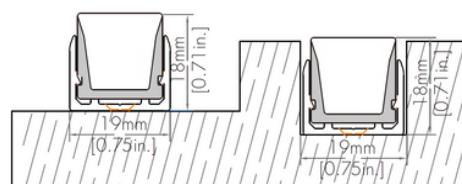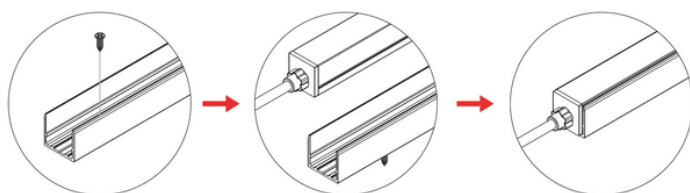



Bendable Bracket

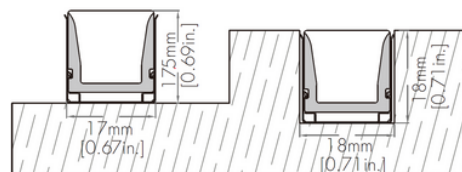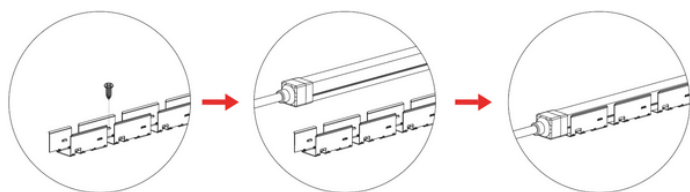



Plaster Profile





Make a groove with the size of W20*H15mm [W0.79*H0.59in.] on the mounting surface.



Fix the dual-bend plaster-in aluminum profile to the groove by screw



Press the neon strip into the dual-bend plaster-in aluminum profile.



The areas on both sides of the illuminated surface should be plastered and dried before completion.