


The Armony

Specification Sheet V00

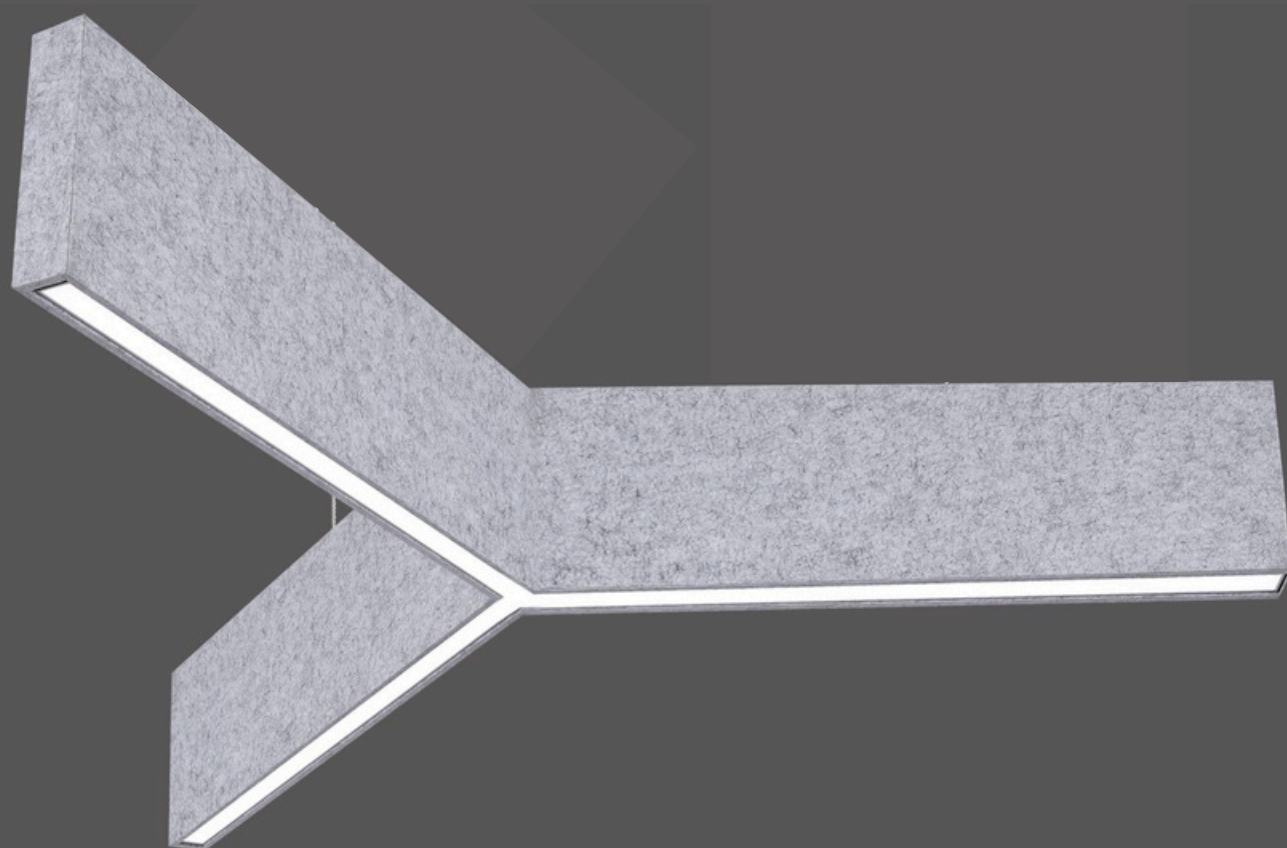

Architectural Collection


kendila

Project: Type: Date:


Specifier:

Upgrade your commercial space with Armony, the sleek acoustic led pendant lighting fixture.

Its Y-shaped design provides ambient lighting and sound quality enhancement. Made with premium materials, Armony is perfect for offices, conference rooms, restaurants, and hotels. Elevate your business with Armony's modern elegance.

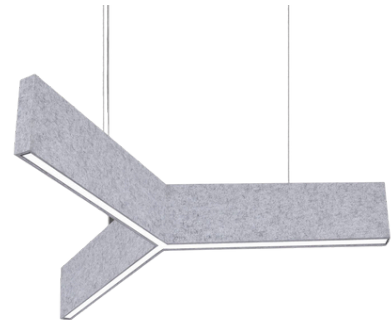


APPLICATION




Pendant Linear Light

CONFIGURATIONS



Armony - Direct Light



Armony's down light version delivers warm ambient lighting and is perfect for offices, conference rooms, restaurants, and hotels. Made with premium materials, this version ensures durability and longevity for any commercial space.



Armony - Direct & Indirect Light

Armony's top and bottom light version enhances lighting and sound absorption for modern commercial spaces. With ambient lighting from both the top and bottom of the fixture, it creates a unique and modern look while providing a pleasant environment

OPTICAL DISTRIBUTION

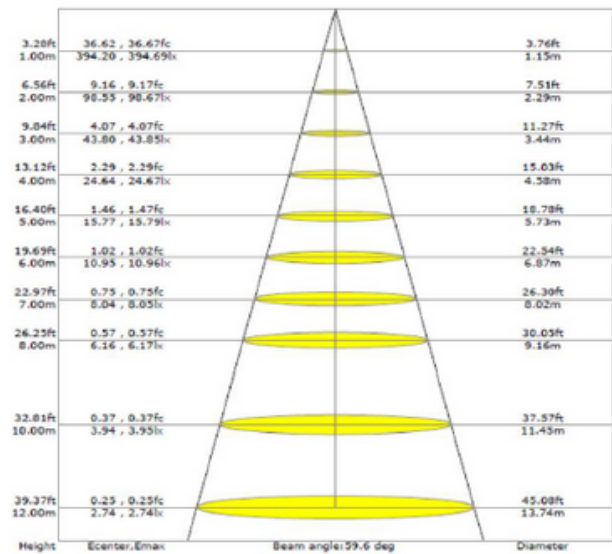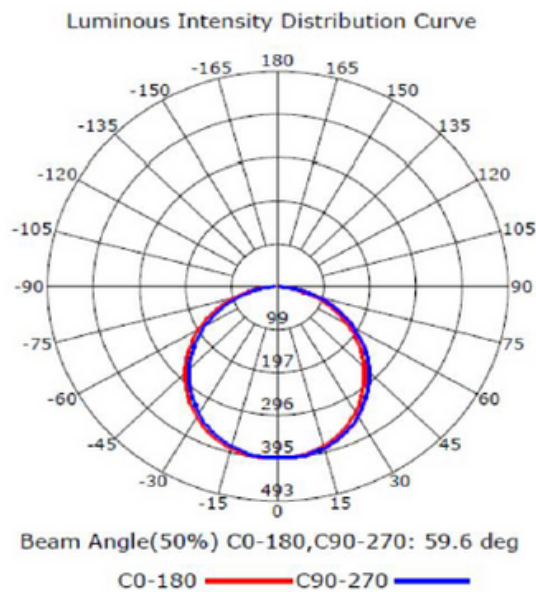

PHYSICAL

Construction

Profile - Aluminium Extrusion

Diffuser

PC, UL-94VO, UV resistant

Profile Finish

Deep Black
Pure White
Custom Finishes available upon request

Ingress Protection

IP20


Operating Ambient Temperature

-20°C to 40°C

Storage Temperature

-20°C to 45°C at 50% Humidity

Available Sizes

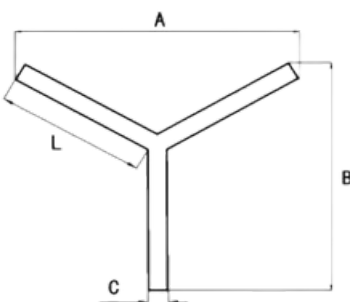

A	B	C	L	H	Dimension Code
19.7"(500mm)	22.2"(563mm)	1.97"(50mm)	11.8"(300mm)	7.4"(188mm)	12
37.9"(960mm)	42.6"(1082mm)	1.97"(50mm)	23.6"(600mm)	7.4"(188mm)	24
56.1"(1425mm)	63.0"(1600mm)	1.97"(50mm)	35.4"(900mm)	7.4"(188mm)	36

Custom dimension is available upon request under Premium tier

AVAILABLE FELT FINISHES



Input Voltage

AC120-277V

Color Temperature CCT

(27) (30) (35) (40) (50)

Dimming

0-10V Dimming available

Power Density

Direct Light Version

- 40W @ 12 Dimensional Code
- 80W @ 24 Dimensional Code
- 120W @ 36 Dimensional Code

Direct & Indirect Light Version

- 35W-15W @ 12 Dimensional Code
- 70W-30W @ 24 Dimensional Code
- 100W-40W @ 36 Dimensional Code

Custom Power Output is available upon request under Premium tier

Light Source

LED SMD 2835 - 3 STEP 1 BIN

Color Rendering Index CRI

(>80) (>90)

Safety Information

ETL Listed, CE, RoHS, IP20, ErP

Total Lumens

Direct Light Version (105 lm/W)

- 4200lm @ 12 Dimension Code
- 8400lm @ 24 Dimension Code
- 12600lm @ 36 Dimension Code

Direct & Indirect Light Version (105 lm/W)

- 3675lm - 1575lm @ 12 Dimension Code
- 7350lm - 3150lm @ 24 Dimension Code
- 10500lm - 4200lm @ 36 Dimension Code

HOW TO SPECIFY

ARC	ACW					
Collection	Product	Type	Dimension	CCT & CRI	Control	Acoustic

ARC	AAR	DL	12	27KS	S	XXX
Architectural	Acoustic Armony	Direct Light		2700K, 80+CRI	Standard	Acoustic Finish Code
		DI	24	27KH	D	
		Direct & Indirect Light		2700K, 90+CRI	0-10V Dimming	
			36	30KS		
				3000K, 80+CRI		
			CU	30KH		
			Custom Dimension	3000K, 90+CRI		
				35KS		
				3500K, 80+CRI		
				35KH		
				3500K, 90+CRI		
				40KS		
				4000K, 80+CRI		
				40KH		
				4000K, 90+CRI		
				50KS		
				5000K, 80+CRI		
				50KH		
				5000K, 90+CRI		

COMPLIANCE



WARRANTY



IMPORTANT NOTES

Do not install the fixture when power is on. Before powering ON, make sure the wiring is correct.
Avoid changing or damaging the circuit or other components of the fixture.

kendila

Specification Sheet V00 - Architectural - The Armony



sales@kendila.com



www.kendila.com



+1 514 999 8098