

kendila

# **BOLA** Concave

Spot Series

**Datasheet. V00**

Architectural Collection

[www.kendila.com](http://www.kendila.com)

Project: .....  
 Specifier: .....

Type: .....  
 Date: .....



## KEY FEATURES


- Available in pure white, and deep black
- Beam angles of 24°, and 36°
- Concave Head tilts at 45°
- Available in 2", 3", and 4", the series maintains identical proportions.

## APPLICATION




Accent Lighting

## OPTICAL DISTRIBUTION



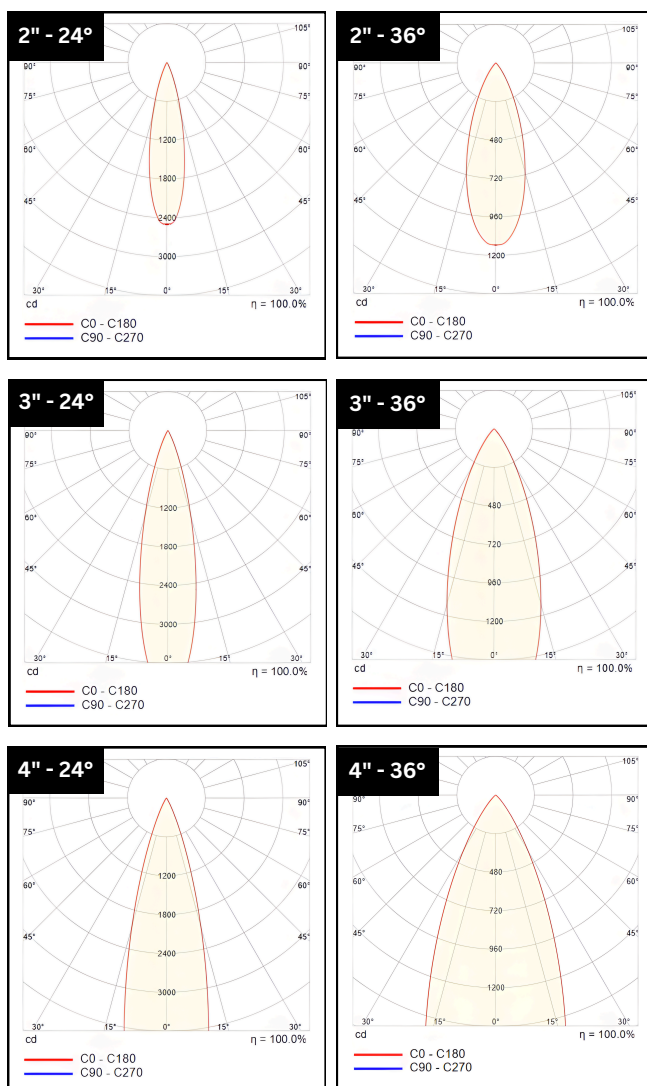


## BEAM ANGLES

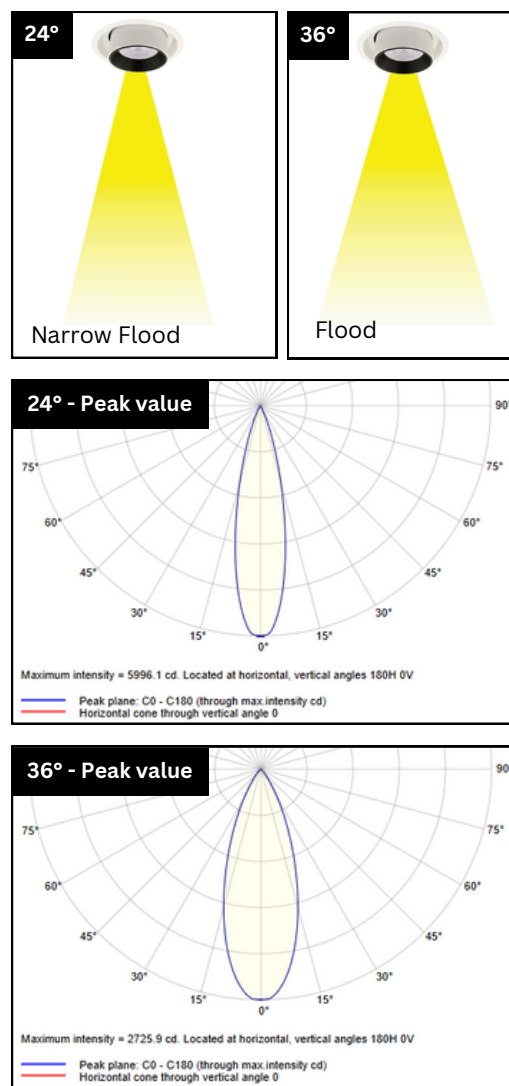



## OVERALL DIMENSIONS

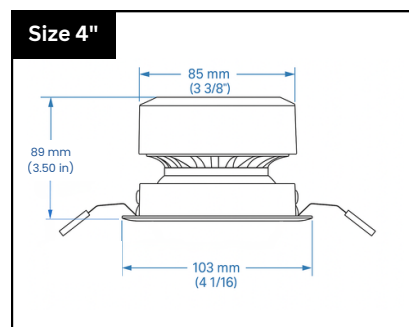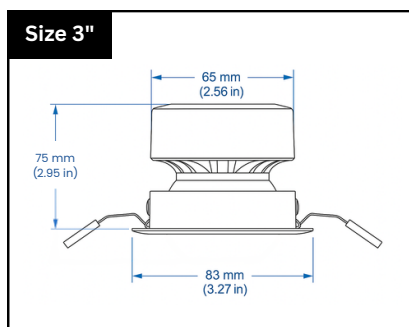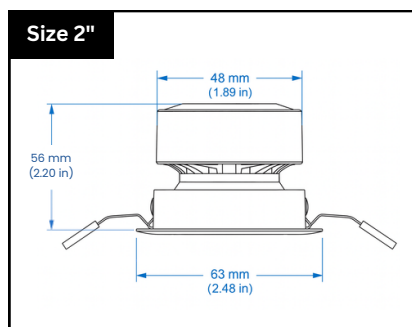

## ELECTRICAL

### Input Voltage

100-240V AC - External Driver

### CCT & CRI

2700K, 3000K, 3500K, 4000K, 5000K @ 95+CRI

Available: Tunable 2700K-5000K

### Power

- Small 2" @ 7W
- Medium 3" @ 12W
- Large 4" @ 18W

### Beam Angles

24°, 36°

### Dimming

TRIAC, DALI

Optional: 0-10V, 1-10V

### Luminous Flux

- Small 2" @ 500lm
- Medium 3" @ 800lm
- Large 4" @ 1200lm

## MECHANICAL

### Finish

Pure White, Deep Black

### Mounting

Recessed



### Die-cut

- Small 2" @  $\Phi 55\text{mm}$   $\Phi 2.16"$
- Medium 3" @  $\Phi 75\text{mm}$   $\Phi 2.95"$
- Large 4" @  $\Phi 95\text{mm}$   $\Phi 3.75"$

### Ingres Protection

IP20

### Finish Options

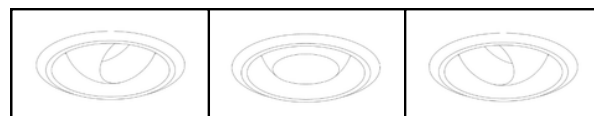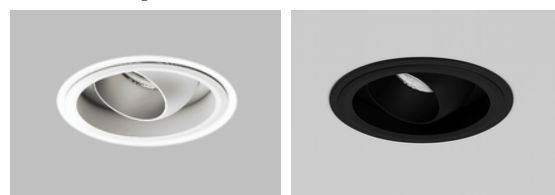

Recessed Concave Head Tilt at 45°



## HOW TO SPECIFY

| ARC        | BCC     |        |          |      |           |
|------------|---------|--------|----------|------|-----------|
| Collection | Product | Finish | Diameter | Beam | CCT & CRI |

|                             |                            |                        |                |                  |                                   |
|-----------------------------|----------------------------|------------------------|----------------|------------------|-----------------------------------|
| <b>ARC</b><br>Architectural | <b>BCC</b><br>Bola Concave | <b>W</b><br>Pure White | <b>2</b><br>2" | <b>24</b><br>24° | <b>27KH</b><br>2700K/+95CRI       |
|                             |                            | <b>B</b><br>Deep Black | <b>3</b><br>3" | <b>36</b><br>36° | <b>30KH</b><br>3000K/+95CRI       |
|                             |                            |                        | <b>4</b><br>4" |                  | <b>35KH</b><br>3500K/+95CRI       |
|                             |                            |                        |                |                  | <b>40KH</b><br>4000K/+95CRI       |
|                             |                            |                        |                |                  | <b>50KH</b><br>5000K/+95CRI       |
|                             |                            |                        |                |                  | <b>TUNE</b><br>2700K-5000K/+95CRI |

## TERMS & NOTICE

Kendila reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply.

All dimensions and values on specification sheet are nominal.

- K-SSV00-ARC-BOLA-CC-EN : October 2025

## COMPLIANCE & WARRANTY

