

kendila

BOLA

Convex

Spot Series

Datasheet. V00

Architectural Collection

www.kendila.com

Project: Type:
 Specifier: Date:



KEY FEATURES


- Available in pure white, and deep black
- Beam angles of 24°, and 36°
- Convex Head tilts at 45°
- Available in 2", 3", and 4", the series maintains identical proportions.

APPLICATION




Accent Lighting

OPTICAL DISTRIBUTION



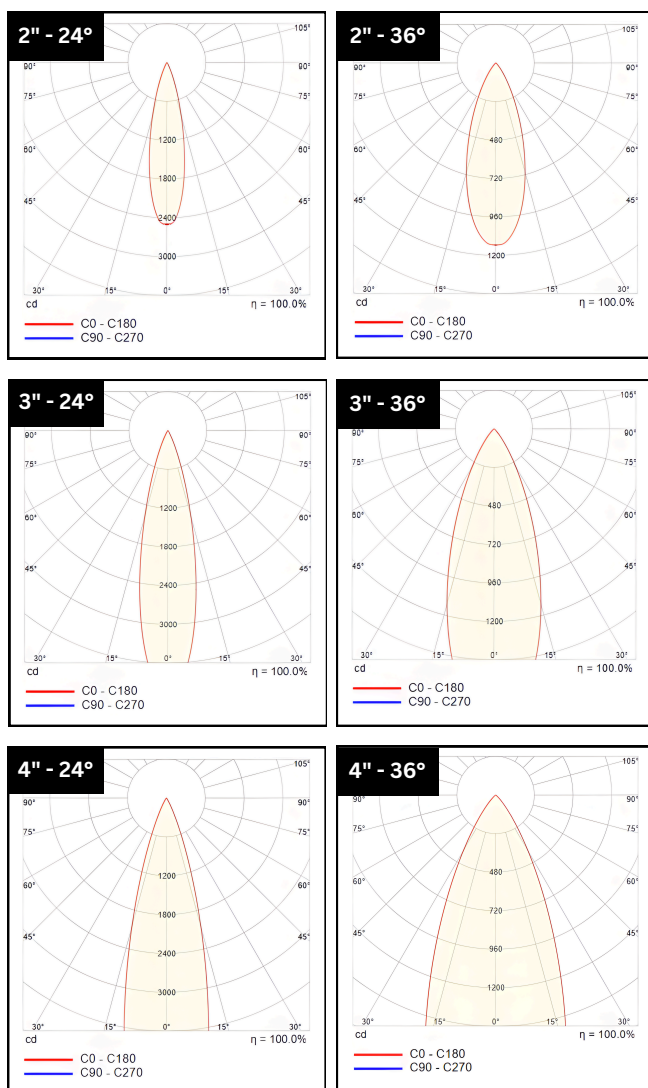


BEAM ANGLES

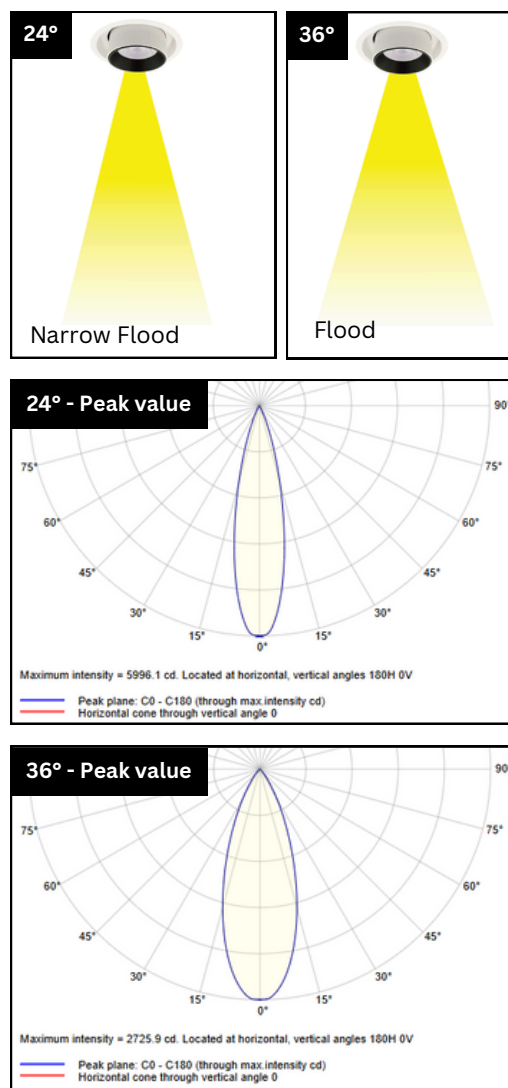



OVERALL DIMENSIONS

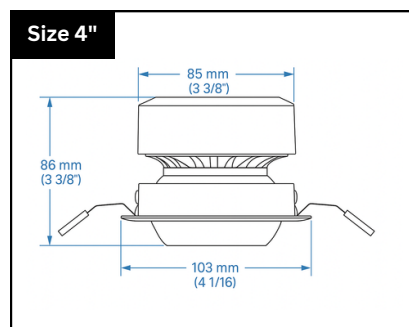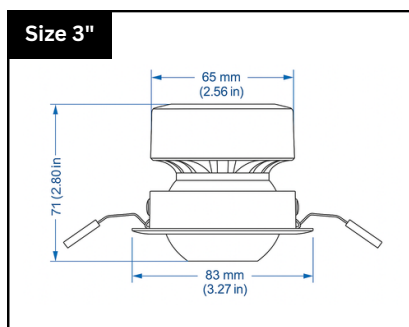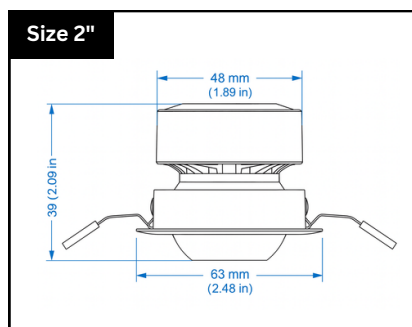

ELECTRICAL

Input Voltage

100-240V AC - External Driver

CCT & CRI

2700K, 3000K, 3500K, 4000K, 5000K @ 95+CRI

Available: Tunable 2700K-5000K

Power

- Small 2" @ 7W
- Medium 3" @ 12W
- Large 4" @ 18W

Beam Angles

24°, 36°

Dimming

TRIAC, DALI

Optional: 0-10V, 1-10V

Luminous Flux

- Small 2" @ 500lm
- Medium 3" @ 800lm
- Large 4" @ 1200lm

MECHANICAL

Finish

Pure White, Deep Black

Mounting

Recessed



Die-cut

- Small 2" @ $\Phi 55\text{mm}$ $\Phi 2.16"$
- Medium 3" @ $\Phi 75\text{mm}$ $\Phi 2.95"$
- Large 4" @ $\Phi 95\text{mm}$ $\Phi 3.75"$

Ingress Protection

IP20

Finish Options

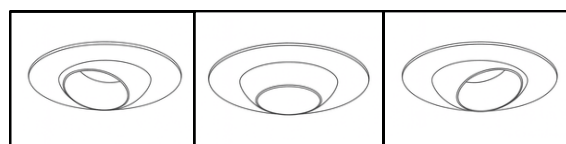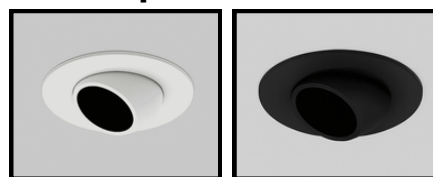

Recessed Convex Head Tilt at 45°



HOW TO SPECIFY

ARC	BCV				
Collection	Product	Finish	Diameter	Beam	CCT & CRI

ARC Architectural	BCV Bola Convex	W Pure White	2 2"	24 24°	27KH 2700K/+95CRI
		B Deep Black	3 3"	36 36°	30KH 3000K/+95CRI
			4 4"		35KH 3500K/+95CRI
					40KH 4000K/+95CRI
					50KH 5000K/+95CRI
					TUNE 2700K-5000K/+95CRI

TERMS & NOTICE

Kendila reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply.

All dimensions and values on specification sheet are nominal.

- K-SSV00-ARC-BOLA-CV-EN : October 2025

COMPLIANCE & WARRANTY

