


The Calmway

Specification Sheet V00

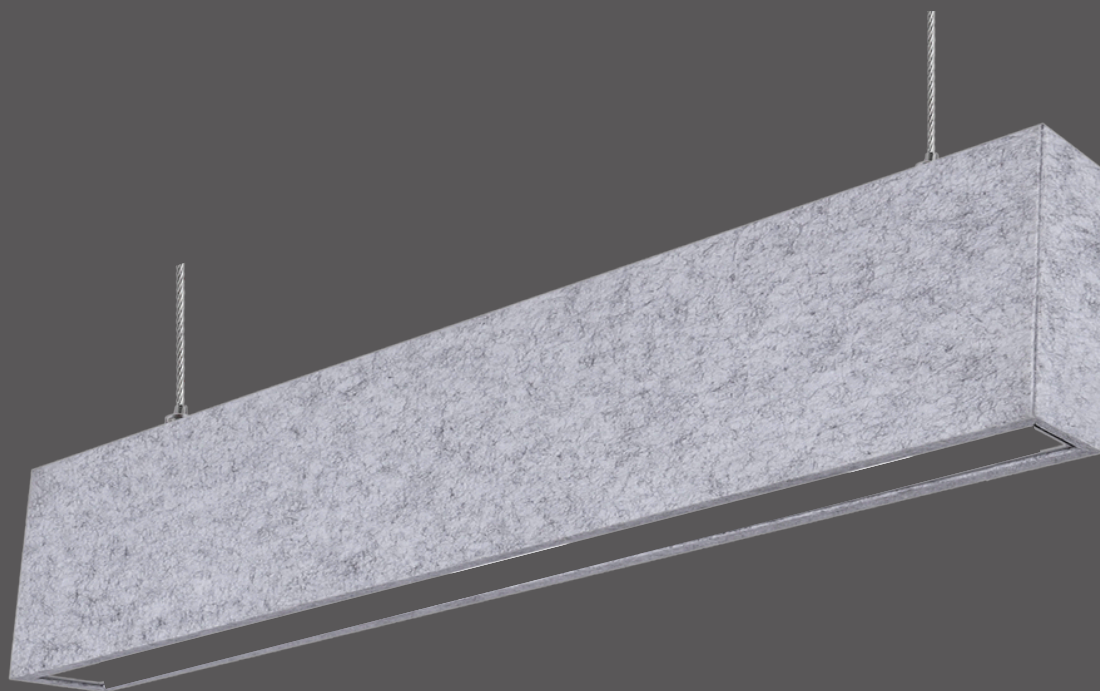

Architectural Collection

kendila

Project: Type: Date:


Specifier:

The Calmway is a sleek and modern linear pendant acoustic lighting fixture that not only illuminates your space, but also reduces noise and enhances acoustic quality.

With its minimalist design and high-performance sound-absorbing material, The Calmway is the perfect choice for any contemporary interior.




APPLICATION




Pendant Linear Light

CONFIGURATIONS




Calmway - Direct Light

Calmway's down light version delivers warm ambient lighting and is perfect for offices, conference rooms, restaurants, and hotels.



Calmway - Direct & Indirect Light

Calmway's top and bottom light version enhances lighting and sound absorption for modern commercial spaces.

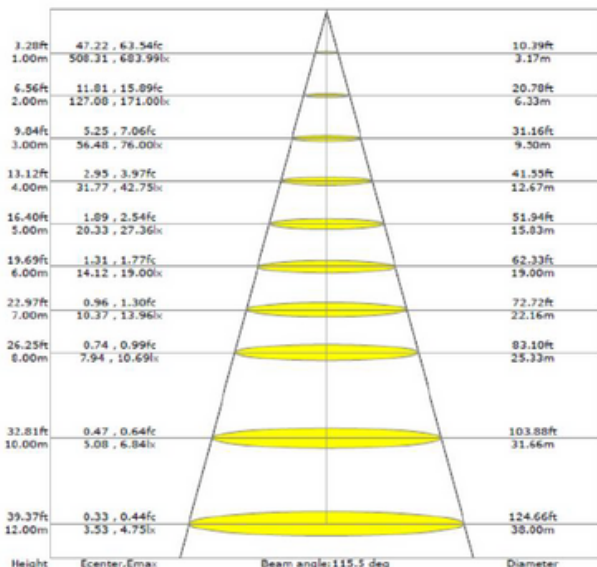

Profile - Aluminium Extrusion


PC, UL-94VO, UV resistant

Anodized Clear Class II
Custom Finishes available upon request

IP20

-20°C to 40°C

-20°C to 45°C at 50% Humidity

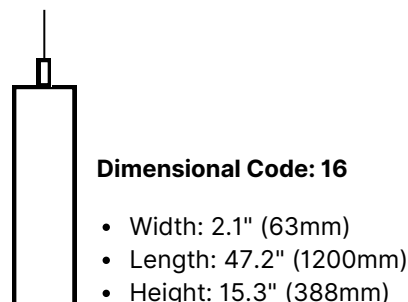

AVAILABLE FELT FINISHES



Input Voltage

AC120-277V

Color Temperature CCT

(27) (30) (35) (40) (50)

Dimming

0-10V Dimming available

Power Density

Direct Light Version:

- 40W

Direct & Indirect Light Version:

- Direct: 36W
- Indirect: 14W

Custom Power Output is available upon request under Premium tier

Light Source

LED SMD 2835 - 3 STEP 1 BIN

Color Rendering Index CRI

(>80) (>90)

Safety Information

ETL Listed, CE, RoHS, IP20, ErP

Total Lumens

Direct Light Version:

- 4200lm @ 40W - 105 lm/W

Direct & Indirect Light Version:

- Direct: 3780lm @ 36W - 105 lm/W
- Indirect: 1470lm @ 14W - 105 lm/W

HOW TO SPECIFY

ARC	ACW					
Collection	Product	Type	Dimension	CCT & CRI	Control	Acoustic

ARC Architectural	ACW Acoustic Calmway	DL Direct Light	08 Height: 7.4"	27KS 2700K, 80+CRI	S Standard	XXX Acoustic Finish Code
		DI Direct & Indirect Light	12 Height: 11.4"	27KH 2700K, 90+CRI	D 0-10V Dimming	
			16 Height: 15.3"	30KS 3000K, 80+CRI		
			CU Custom Dimension	30KH 3000K, 90+CRI		
				35KS 3500K, 80+CRI		
				35KH 3500K, 90+CRI		
				40KS 4000K, 80+CRI		
				40KH 4000K, 90+CRI		
				50KS 5000K, 80+CRI		
				50KH 5000K, 90+CRI		

COMPLIANCE



WARRANTY



IMPORTANT NOTES

Do not install the fixture when power is on. Before powering ON, make sure the wiring is correct.
Avoid changing or damaging the circuit or other components of the fixture.

kendila

Specification Sheet V00 - Architectural - The Calmway



sales@kendila.com



www.kendila.com



+1 514 999 8098