

kendila

LINY

Linear Series

Datasheet. V01

Architectural Collection

www.kendila.com


Project: Type:
 Specifier: Date:




KEY FEATURES

- Available in white, RGBW, DMX RGBW
- Beam angles of 120°, 15°, 30°, 45°, 60°.
- Field Splicing – Up to 10M (32.8ft.)
- Tough structure with IK10 protection.
- IP67 rated for indoor & outdoor use.


APPLICATION



Wall Grazing












Wall Washing




Diffused Light

OPTICAL DISTRIBUTION

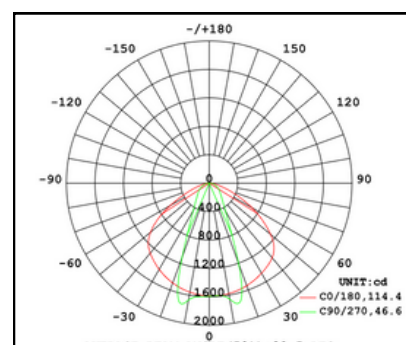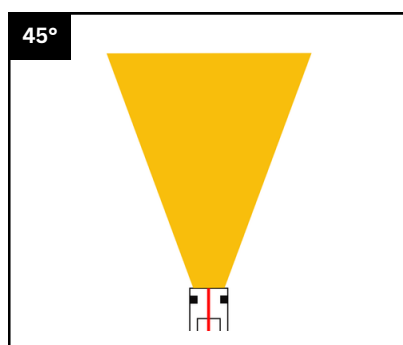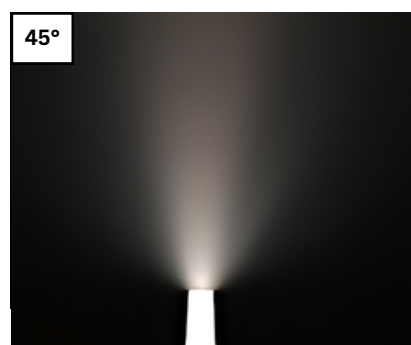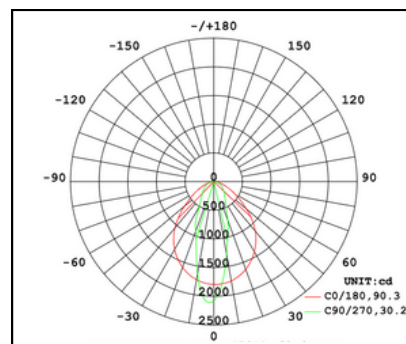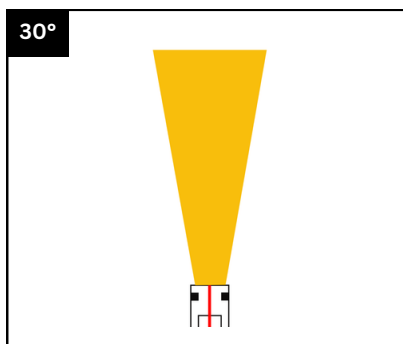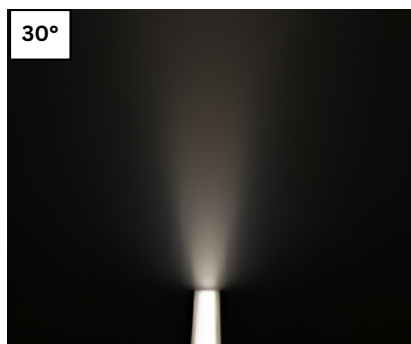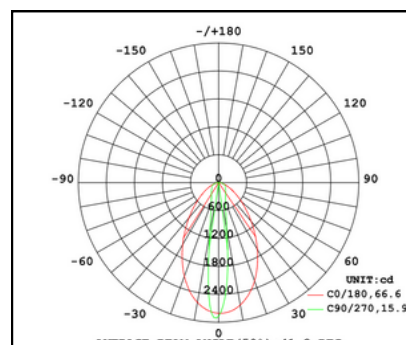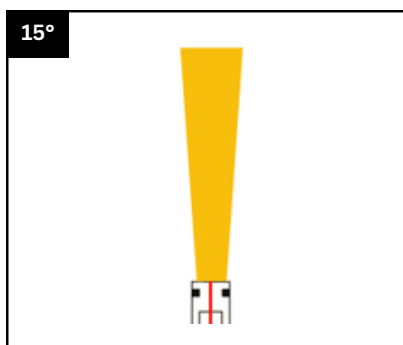
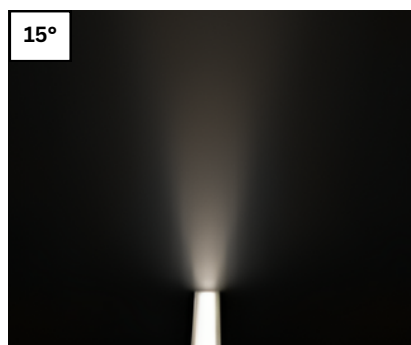






OPTICAL DISTRIBUTION

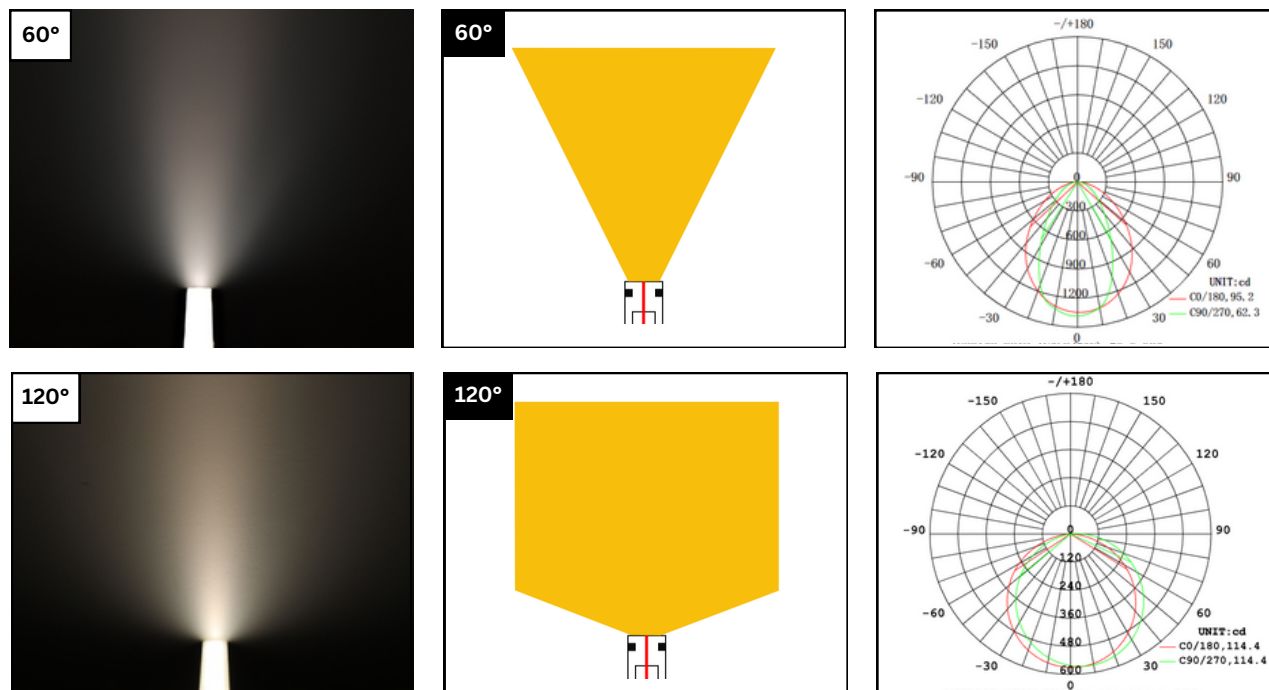

OVERAL DIMENSIONS

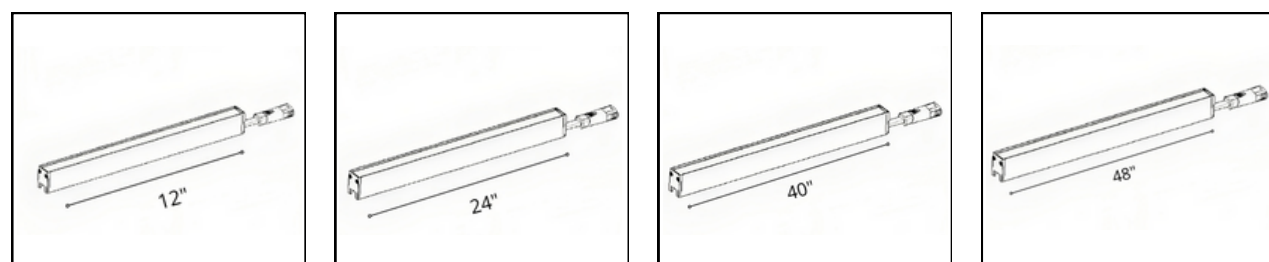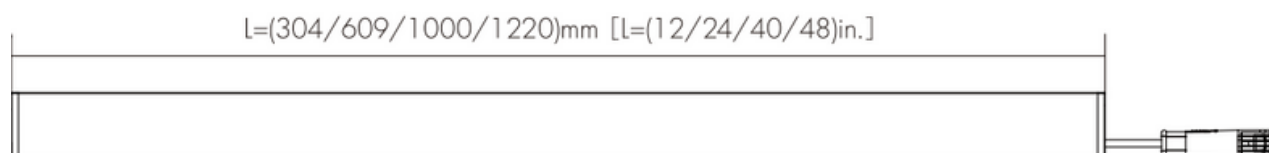

Available in 4 lengths: 12", 24", 40", 48"
 Field Splicing for up to 10meter (32ft) run length
 with seamless light performance





ELECTRICAL

Input Voltage

24VDC

CCT & CRI

2700K, 3000K, 3500K, 4000K, 5000K, 6500K
80+CRI, 90+CRI

Safety Information

cULus Listed, CE, RoHS, IP67 (Wet Location), IK10

Dimming


0-10V Available

Length & Power		15°	30°	45°	60°	120°
Light Efficacy		100 lm/W	113 lm/W	123 lm/W	113 lm/W	63 lm/W
12"	8W	800lm	900lm	980lm	900lm	500lm
24"	15W	1500lm	1690lm	1840lm	1690lm	940lm
40"	26W	2600lm	2750lm	3170lm	2750lm	1690lm
48"	30W	3000lm	3170lm	3670lm	3170lm	1960lm

ACCESSORIES



Clip & Screw Bracket



60° Bracket



90° Bracket



180° Bracket



Anti-Glare Shield



Cable Clamp





End Connector




PRODUCT CHARACTERISTICS


The fixture incorporates bottom trunking for securing excess cable during the application of installation accessories and supports daisy chaining for extended lengths

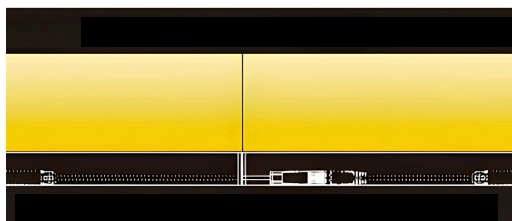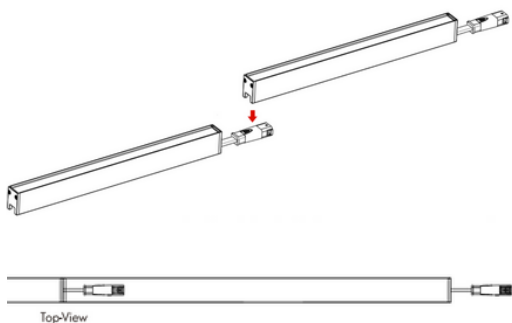


The product offers versatile positioning options facilitated by the extension cable, enabling a top view rotation ranging from 90 to 180 degrees, as well as a side rotation spanning from 150 to 180 degrees

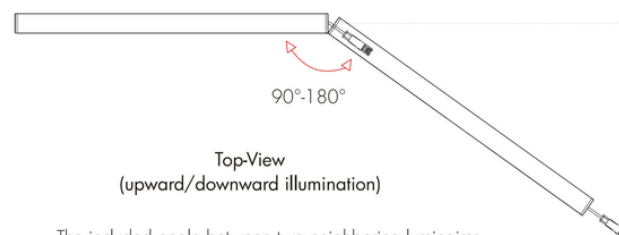

The included angle between two neighboring luminaires is 90°-180° without the use of extension cable.
Do not lower angles to avoid placing stress on cable.




Side-View (Inward illumination)

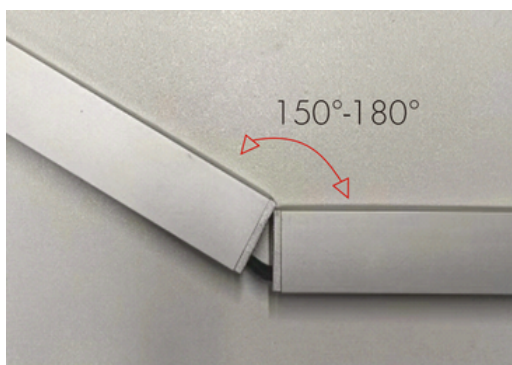

The included angle between two fixtures ranges from 150 to 180° without the need for an extension cable.

Side-View (Outward illumination)

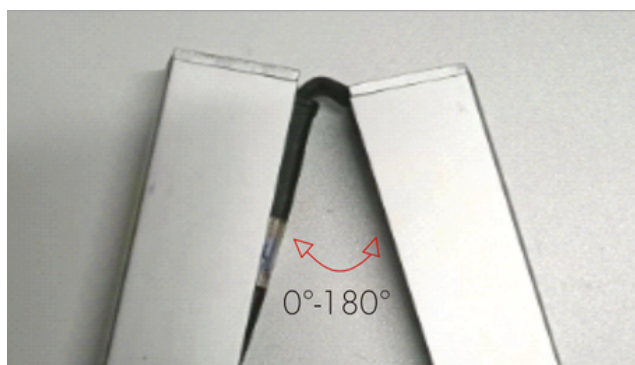

The included angle between two fixtures ranges from 0 to 180° without the need for an extension cable.



HOW TO SPECIFY

ARC	LNy					
Collection	Product	Length	Beam	CCT & CRI	Anti-Glare	Mounting Options

ARC Architectural	LNy Liny	12 12"	15 15°	24KS 2400K/80CRI	S No Baffle	CLS Clip & Screw
		24 24"	30 30°	27KS 2700K/80CRI	B With Baffle	B60 60° Bracket
		40 40"	45 45°	30KS 3000K/80CRI		B90 90° Bracket
		48 48"	60 60°	35KS 3500K/80CRI		180 180° Bracket
			120 120°	40KS 4000K/80CRI		
				50KS 5000K/80CRI		
				65KS 6500K/80CRI		

Replace S with H for 90CRI

TERMS & NOTICE

Kendila reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply.

All dimensions and values on specification sheet are nominal.

- K-SSV01-ARC-LINY-EN : March 2025

COMPLIANCE & WARRANTY



INDOOR

OUTDOOR