

kendila

NEBULA

Pendant Series

Datasheet. V00

Selected Collection

www.kendila.com

Project:
Specifier:


Type:
Date:



KEY FEATURES

- Adjustable height mechanism
- Offered in several refined finishes to match diverse interior palettes
- Clean, minimalist design
- Integrated Direct and indirect light

OVERAL DIMENSIONS

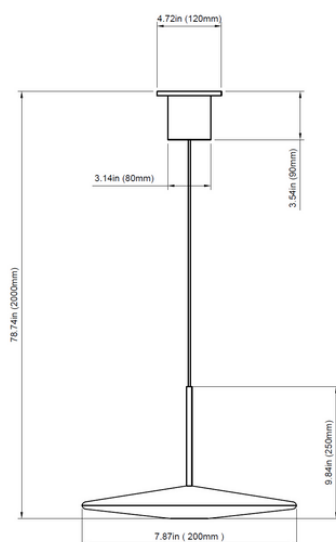

ELECTRICAL

Input Voltage

110-120VAC (Integrated Driver)

Power

8W

Dimming

TRIAC


Installation

Hardwired


Driver Output

36V/200mA

APPLICATION



Pendant



Indoor Use

MECHANICAL

Material

Molded Glass

Available Finish Options

Green

White

Orange

Wire Reeling

Manual Free height Adjustment

Overall Height from 500 to 2000mm

Ingress Protection

IP20 - Indoor Use Only

LIGHTING

Light Source

LED Light

Luminous Flux

600lm @ 75lm/W

Beam Angle

36° - For Direct Light

CCT & CRI

3000K, 90+CRI

Light Distribution

Accent & Ambient Light



HOW TO SPECIFY

SLC	NBL		
Collection	Product	Glass Finish	CCT & CRI
SLC Selected	NBL Nebula	GRN Green WHT White ORA Orange	30KH 3000K/90CRI

TERMS & NOTICE

Kendila reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply.

All dimensions and values on specification sheet are nominal.

- K-SSV00-SLC-NEBULA-EN : April 2025