


The Velen

Specification Sheet V00

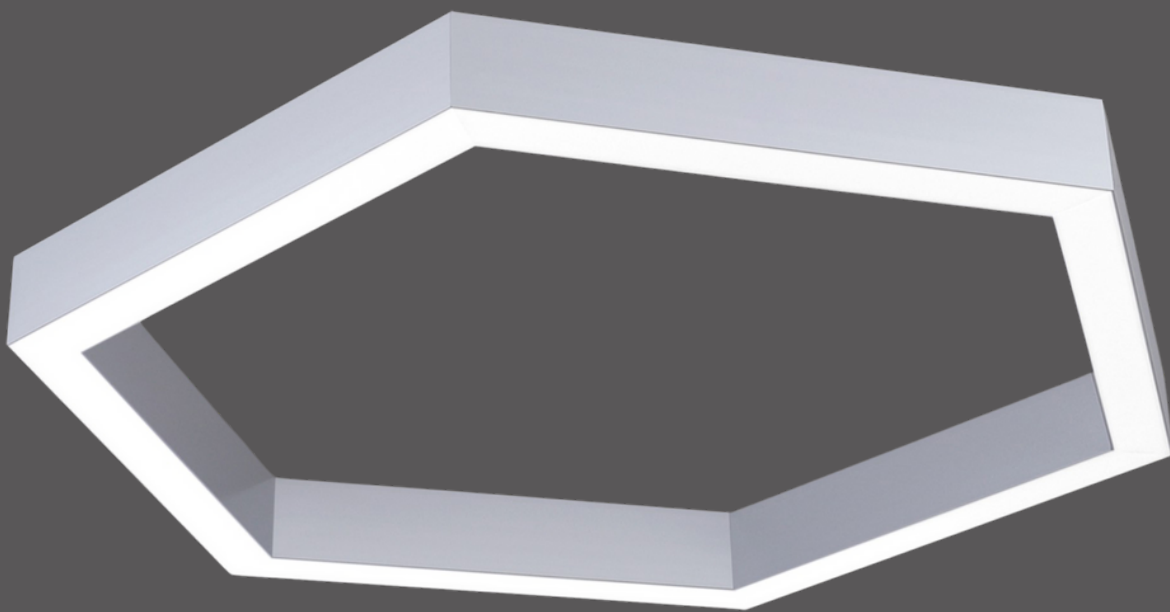


Project: Type: Date:

Specifier:

Illuminate and elevate your commercial space with Velen, a hexagonal acoustic LED pendant light. Its modern design enhances both ambient lighting and sound quality, making it perfect for offices, conference rooms, restaurants, and hotels. Crafted with premium materials, Velen combines style and functionality, setting a new standard for contemporary spaces.



APPLICATION




Pendant Shaped Light




Surface Mounted

CONFIGURATIONS

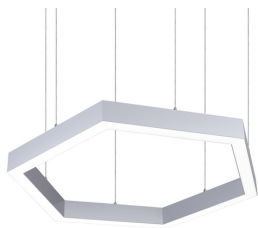

Velen - Pendant



Velen Pendant is perfect for modern offices and conference rooms, seamlessly combining ambient lighting and enhanced sound quality in a stylish hexagonal design. It's an ideal choice for spaces seeking both functionality and a sophisticated aesthetic



Velen - Surface Mounted

Opt for Velen Surface Mounted for efficient lighting and exceptional sound quality. This hexagonal acoustic LED fixture integrates seamlessly into surfaces, making it a practical choice for compact workspaces or areas with a minimalist design preference.

OPTICAL DISTRIBUTION

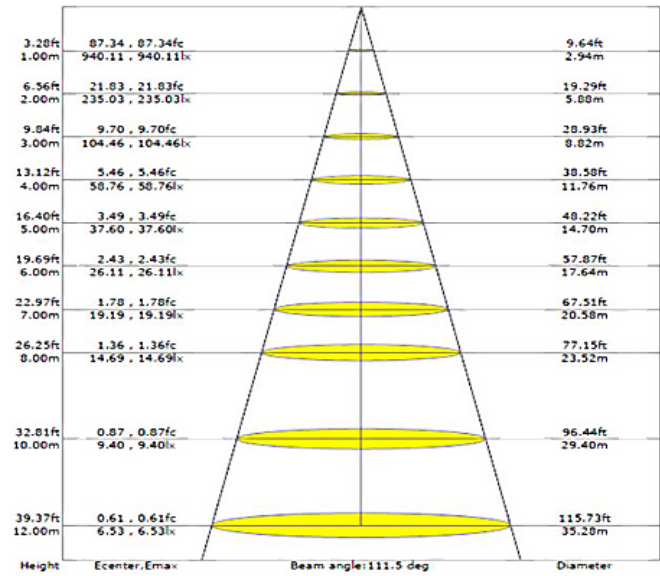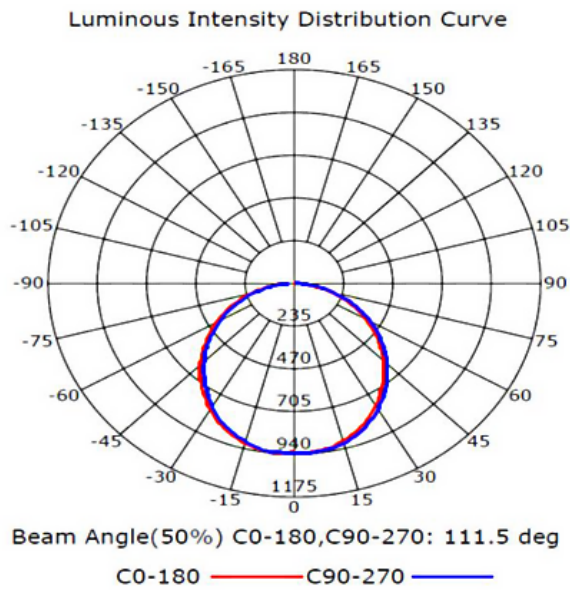

PHYSICAL

Construction

Profile - Aluminium Extrusion

Diffuser

PC, UL-94VO, UV resistant

Profile Finish

Deep Black
Pure White
Custom Finish available

Ingress Protection

IP20


Operating Ambient Temperature

-20°C to 40°C

Storage Temperature


-20°C to 45°C at 50% Humidity

Available Sizes

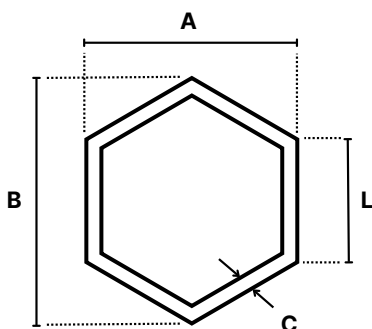

A	B	C	L	H	Dimension Code
16.4"(416mm)	18.9"(480mm)	1.97"(50mm)	9.45"(240mm)	3.0"(75mm)	19
20.5"(520mm)	23.6"(600mm)	1.97"(50mm)	11.8"(300mm)	3.0"(75mm)	24
30.7"(780mm)	35.4"(900mm)	1.97"(50mm)	17.7"(450mm)	3.0"(75mm)	36
40.9"(1038mm)	47.2"(1200mm)	1.97"(50mm)	23.6"(600mm)	3.0"(75mm)	48

AVAILABLE FELT FINISHES

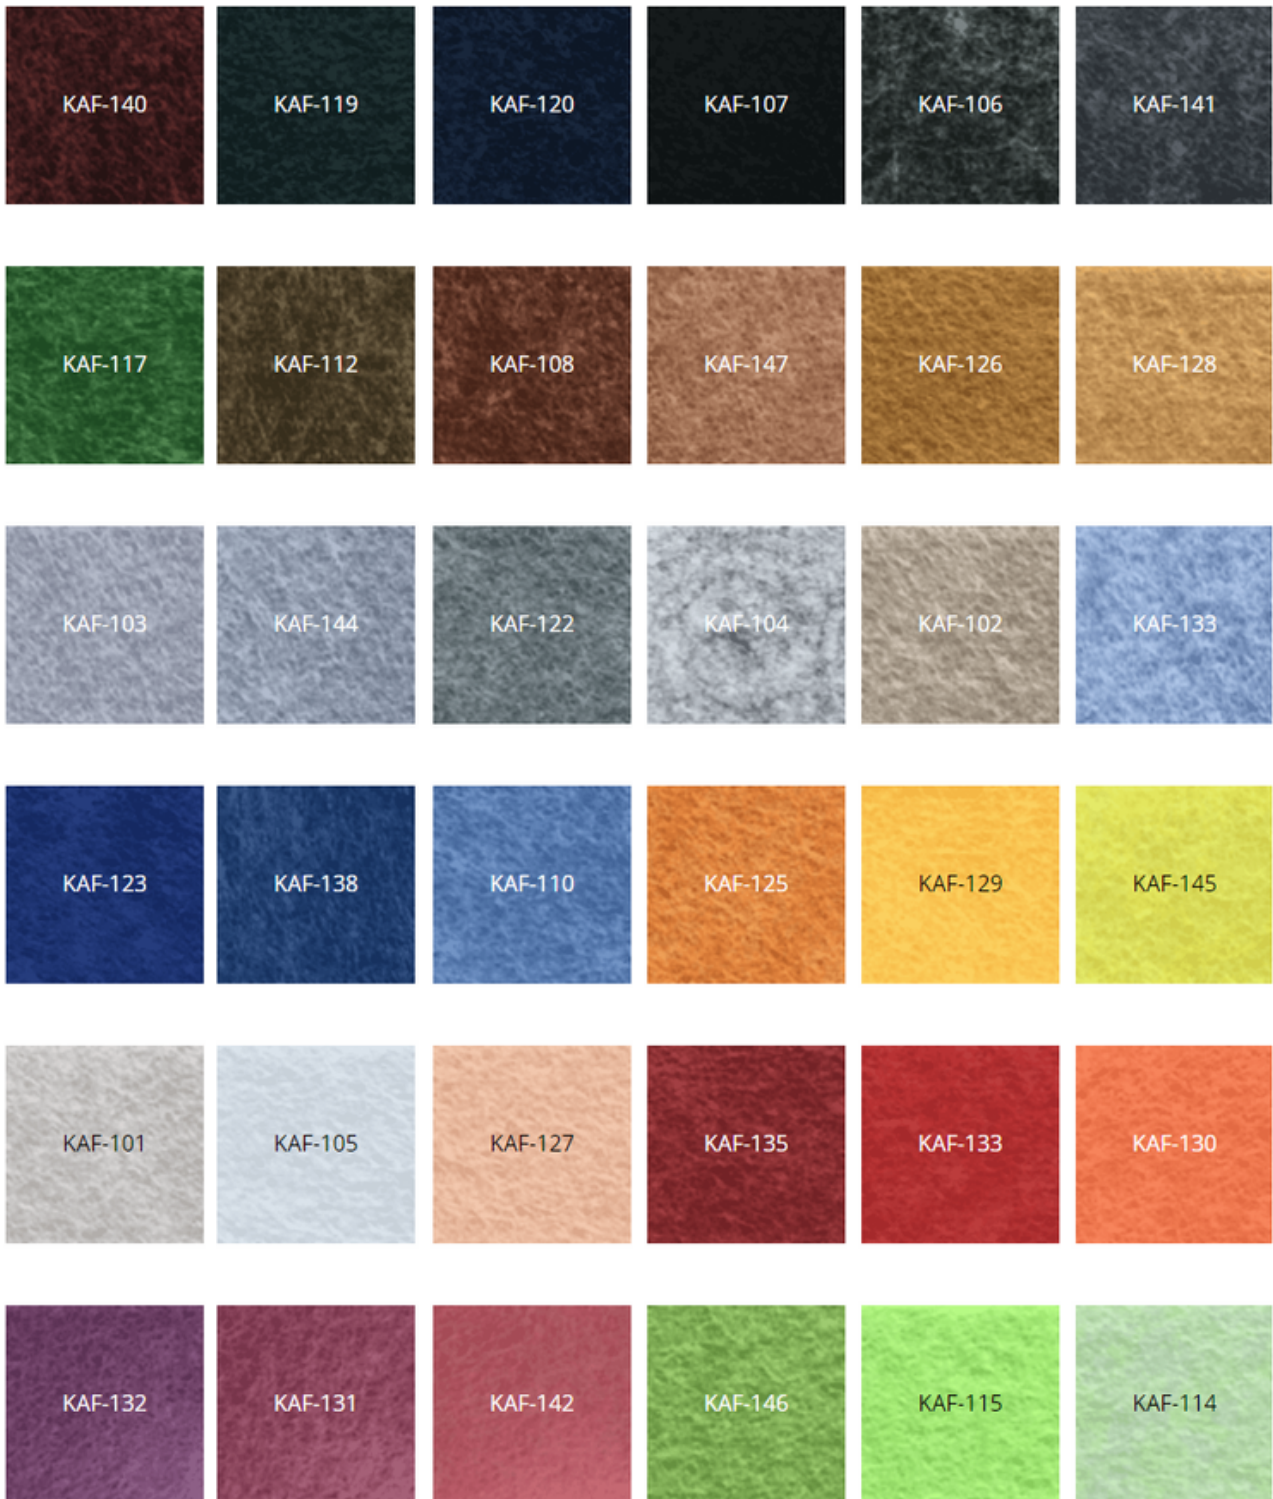

Input Voltage

AC120-277V

Color Temperature CCT



Dimming

0-10V Dimming available

Power Density

- Dimension Code 19 - 25W
- Dimension Code 24 - 40W
- Dimension Code 36 - 90W
- Dimension Code 48 - 180W

Light Source

LED SMD 2835

Color Rendering Index CRI




Safety Information

ETL Listed, CE, RoHS, IP20, ErP

Total Lumens

- 2625lm @ 19 Dimension Code
- 4200lm @ 24 Dimension Code
- 9450lm @ 36 Dimension Code
- 18900lm @ 48 Dimension Code

HOW TO SPECIFY



ARC Architectural	AVL Acoustic Velen	PL Pendant	19	27KS 2700K, 80+CRI	S Standard	XXX Acoustic Finish Code
		SM Surface Mounted	24	27KH 2700K, 90+CRI	D 0-10V Dimming	
			36	30KS 3000K, 80+CRI		
			48	30KH 3000K, 90+CRI		
				35KS 3500K, 80+CRI		
				35KH 3500K, 90+CRI		
				40KS 4000K, 80+CRI		
				40KH 4000K, 90+CRI		
				50KS 5000K, 80+CRI		
				50KH 5000K, 90+CRI		

COMPLIANCE



WARRANTY



IMPORTANT NOTES

Do not install the fixture when power is on. Before powering ON, make sure the wiring is correct. Avoid changing or damaging the circuit or other components of the fixture.

kendila

Specification Sheet V00 - Architectural - The Velen



sales@kendila.com



www.kendila.com



+1 514 999 8098