


The Cubix

Specification Sheet V00

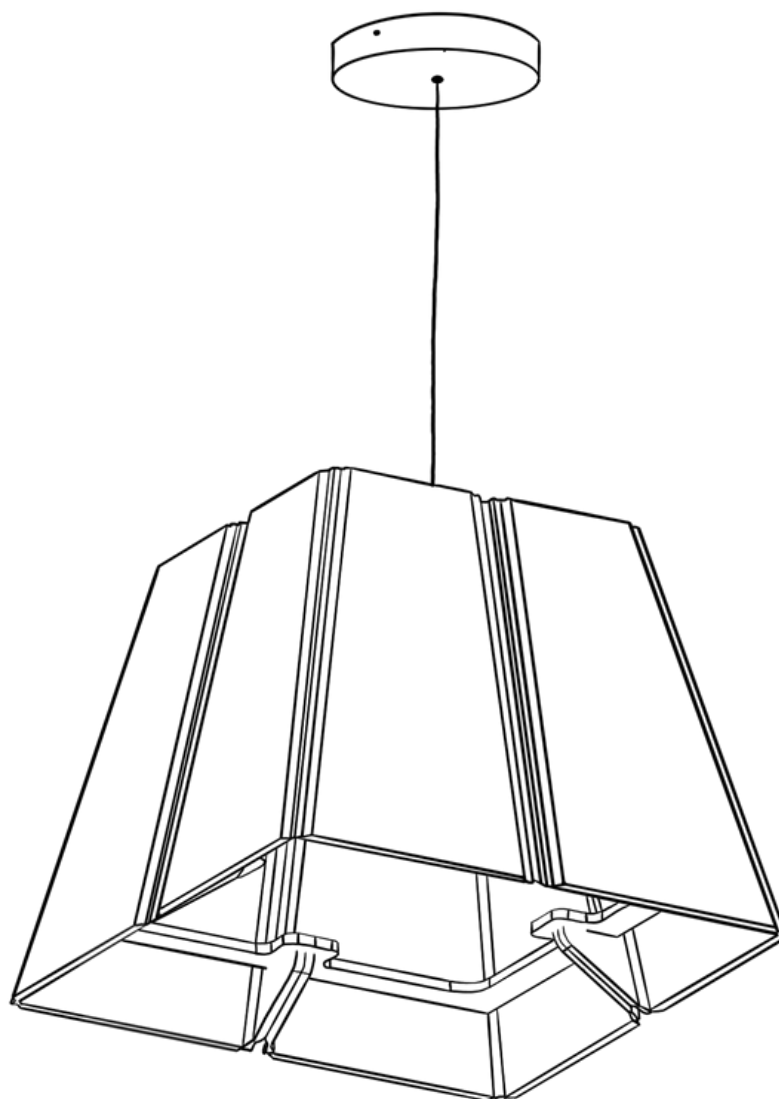


Project: Type: Date:


Specifier:

The Cubix pendant is a sleek fusion of contemporary design and functionality. Crafted from premium materials, its distinctive four-sided structure sets it apart as a versatile statement piece.

This modern accessory seamlessly transitions between casual and formal settings, reflecting a perfect blend of style and innovation.

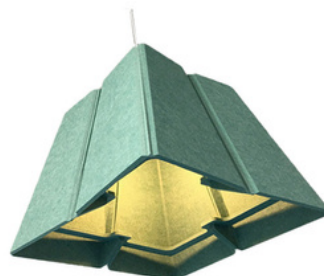


APPLICATION



Pendant Light

OPTICAL DISTRIBUTION

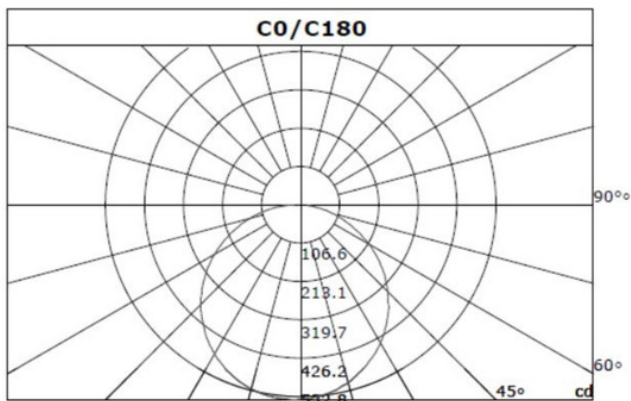

Height	Center lx	Diameter
1.m	530.08 lx	312.13cm
2.m	132.52 lx	624.26cm
3.m	58.90 lx	936.39cm
4.m	33.13 lx	1248.52cm
5.m	21.20 lx	1560.65cm
6.m	14.72 lx	1872.78cm
7.m	10.82 lx	2184.92cm
8.m	8.28 lx	2497.05cm
9.m	6.54 lx	2809.18cm
10.m	5.30 lx	3121.31cm
11.m	4.38 lx	3433.44cm
12.m	3.68 lx	3745.57cm
13.m	3.14 lx	4057.70cm
14.m	2.70 lx	4369.83cm
15.m	2.36 lx	4681.96cm
16.m	2.07 lx	4994.09cm

PHYSICAL

Material


Recycled PET Felt

Material Thickness

9mm

Installation

Hardwired

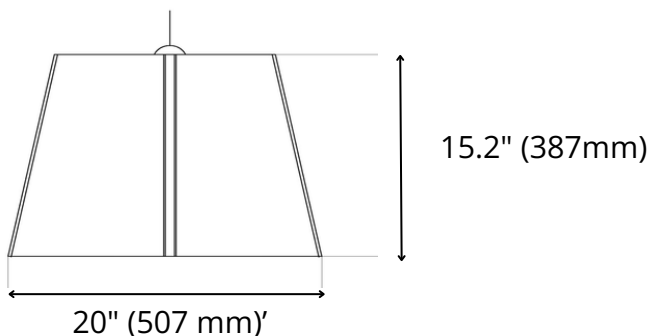

ELECTRICAL

Input Voltage

AC120-277V

Color Temperature CCT



Dimming

0-10V Dimming available

Light Source

E26 LED Bulb

LED Version available under Premium Tier

Color Rendering Index CRI



Total Lumens

- 1200 Lumens

AVAILABLE FELT FINISHES



HOW TO SPECIFY



ARC Architectural	ACB Acoustic Cubix	PL Pendant	27KH 2700K, 90+CRI	XXX Acoustic Finish Code
			30KH 3000K, 90+CRI	
			40KH 4000K, 90+CRI	
			50KH 5000K, 90+CRI	

COMPLIANCE



WARRANTY



IMPORTANT NOTES

Do not install the fixture when power is on. Before powering ON, make sure the wiring is correct.
Avoid changing or damaging the circuit or other components of the fixture.

kendila

Specification Sheet V00 - Architectural - The Cubix



sales@kendila.com



www.kendila.com



+1 514 999 8098