

kendila

SERENE

Acoustic Series

Installation. V00

Architectural Collection


www.kendila.com




BEFORE YOU BEGIN

- **Indoor Use Only:** This product is designed for indoor use and should be kept away from open flames and high-temperature items.
- **Professional Installation Required:** Installation and usage must be performed by qualified electricians.
- **Check for Damage:** Before installation, inspect the product for any transportation damage to ensure timely replacement or return.
- **No Unauthorized Repairs:** Only authorized personnel may disassemble or repair the product. For maintenance, contact our sales team.
- **Cleaning Instructions:** Turn off power before cleaning. Use a dry cloth; do not use chemical or corrosive solvents.


PRODUCT COMPONENTS

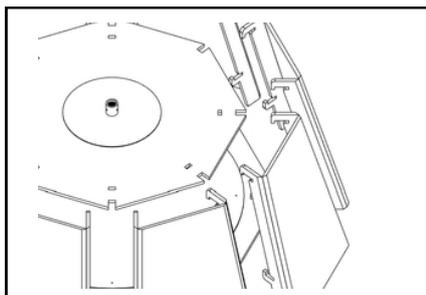


ACOUSTIC PANELS



MOUNTING PLATE

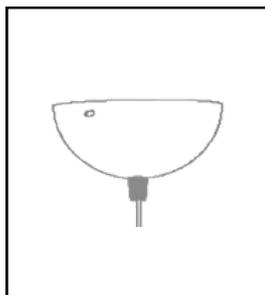

CANOPY (Standard)

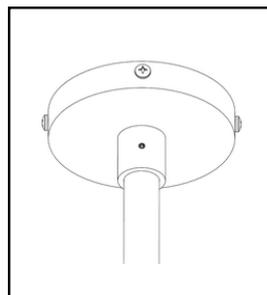

CANOPY (LED Version)

- All fasteners and hardware come pre-assembled in the product for practicality purposes.
- Per order quantity, some boxes may include more than one unit for space management.

TECHNICAL REQUIREMENTS

Electrical

- 120–277 VAC supply
- Verify supply voltage before installation

Mounting

- Install on structurally suitable junction box
- Support must be rated for fixture load

Driver

- Integral or remote (LED configuration)
- Remote must be in an accessible location

INSTALLATION REQUIREMENTS

Pre-Installation





- Disconnect power at breaker
- Verify all components are present
- Assemble acoustic panels prior to mounting

Final Check

- Ensure all connections are secure
- Verify fixture is level
- Confirm proper operation




INSTALLATION STEPS (STANDARD - E26 Lamp Version)

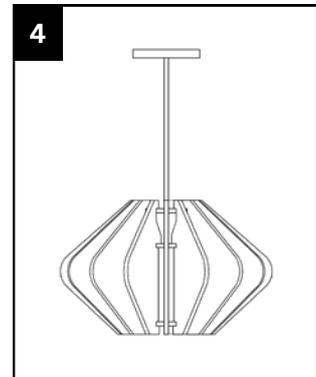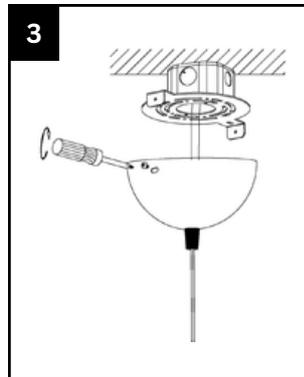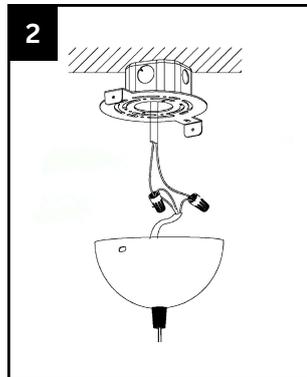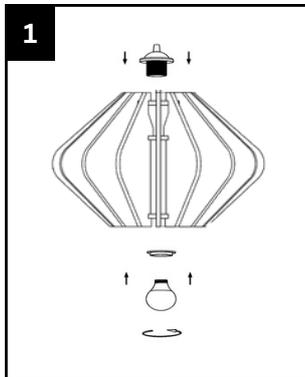


- Assemble acoustic panels prior to installation (supplied flat-packed)
- E26 LED lamp supplied with product


INSTALLATION STEPS (Integrated LED Version)

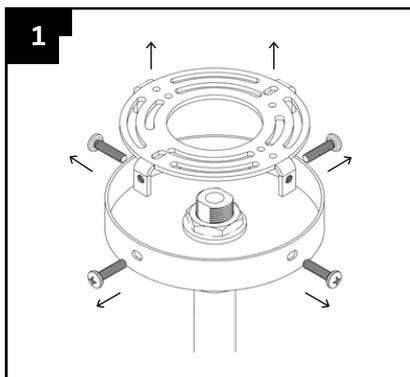


Remove the mounting plate from the canopy

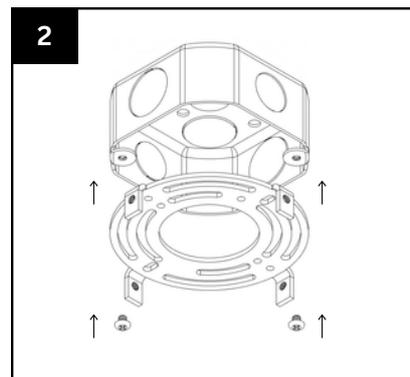


Fix the Mounting Plate to the Junction box

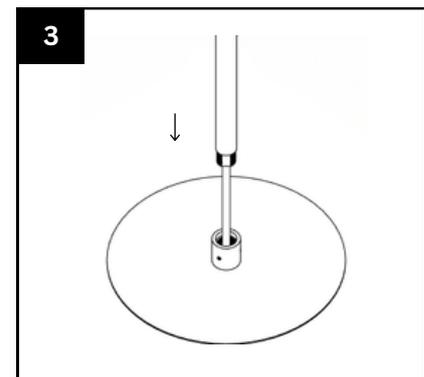


Fix the stem to the top ring's knob after passing the cable

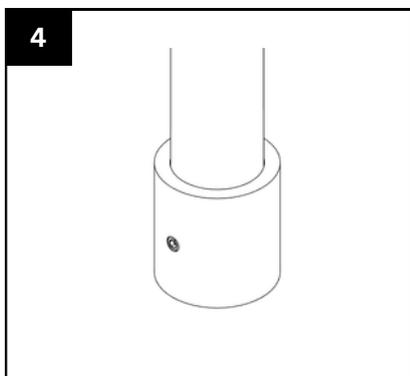

Tighten the set screw in knob using 2mm HEX Key

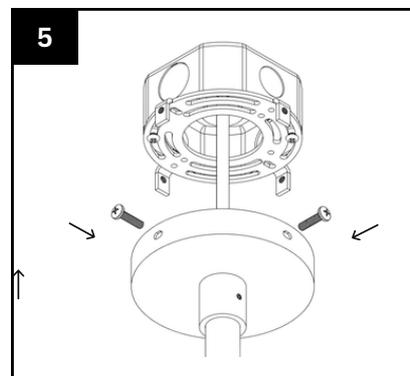

After connecting the wires, fix the canopy to the mounting plate

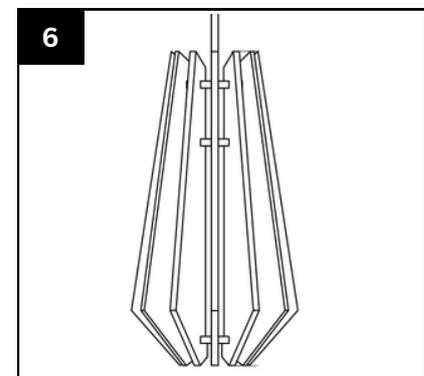

Restore power



IMPORTANT NOTES

- Compliance: Installation must comply with applicable codes and be performed by someone familiar with the product's construction, operation, and associated hazards.
- Note: Adhering to these conditions is crucial to prevent damage to the fixture's lifespan
- Installation Precautions: Always turn off power before installation. Installation and maintenance should only be conducted by qualified electricians or trained personnel.

- Safety Considerations:
 - Prioritize fire prevention, electrical safety, and shock resistance.
 - Do not cover the fixture with flammable materials.
- Fastening and Connection Guidelines:
 - Ensure all screws and terminals are securely tightened.
 - No loose or improper connections are allowed.

- **MIN 90 °C SUPPLY CONDUCTORS**
- **Suitable for dry indoor locations**

Pay attention to the following points when installing in all methods

- Check whether all connectors are connected well and firmly.
- Check that all power cords are connected correctly.
- All the illustrations in the user instruction are diagrams only.

TERMS & NOTICE

Kendila reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply.

All dimensions and values on specification sheet are nominal.

- K-ISV00-ARC-SERENE-EN : May 2025

COMPLIANCE & WARRANTY

